

MB30

Mult-Biometric T&A and Access Control Terminal




Features

- Fingerprint, face, RFID and password 4 type verification mode
- High-speed identification less than 1 second
- TCP/IP Port for Internet connection
- Access Port available to control one lock and exit button
- Optional 5V 1900mAH UPS, standby up to 3 hours


Specification

Product		MB30
Main	Biometric RF Optional	Fingerprint and Face 125kHz EM / 13.56MHz MIFARE
Capacity	Max User(1:N) Max Fingerprint (1:N) Max Face (1:N) Max Record	1000 500 200 50,000
Interface	TCP/IP USB Relay	10M/100M USB 2.0 (Host) 1 Relay
Hardware	LCD Sound Operating Temp. Operating Humidity Power Dimensions(W x H x D mm)	2.8" Color LCD Stereo speaker 0 °C- 45 °C 20% ~ 80% DC 12V 1.5A 161.93 x 152.82 x 30.59
Function	Standard	Automatic Status Switch, Self-Service Query, DST, T9 Input 9 Digit User ID, Scheduled Bell, Photo ID Lock, sensor, Exit button
	Optional	ID / MF
Compatibility		ZKTime.net 3.0 ZKAccess 3.5

Configuration

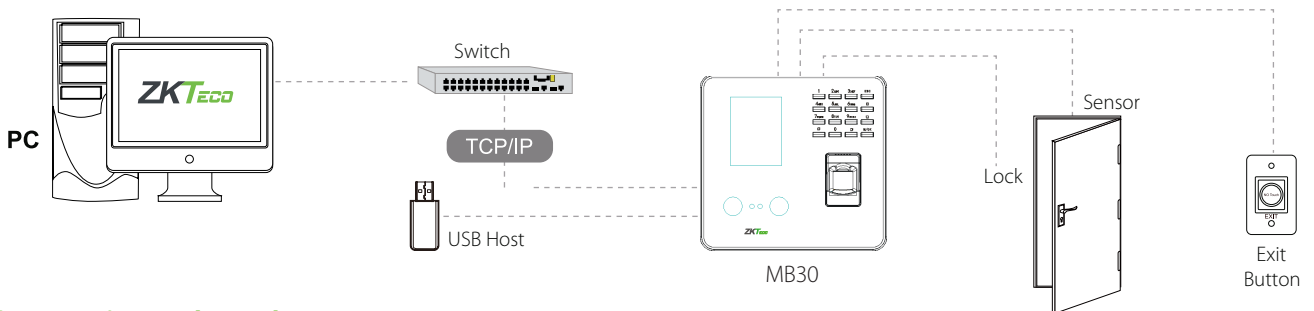

Dimensions (mm)

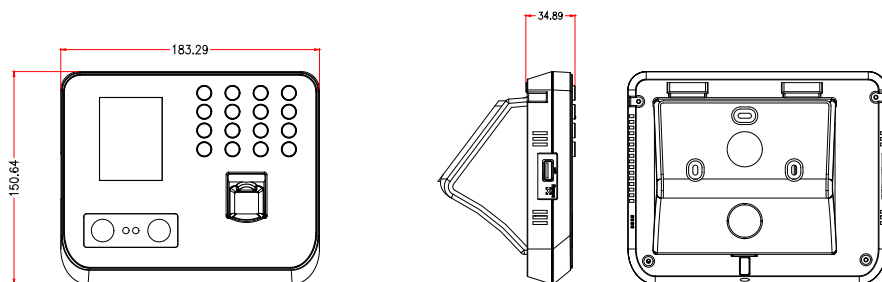

ZKTECO CO.,LTD.

www.zkteco.com

E-mail: sales@zkteco.com

V3.0 2018.11.29

Copyright © 2018 ZKTECO CO., LTD. All rights reserved.