



Electric Automatic Swing Barrier

AV-SB-02 Transparent

Features

- Reasonable and reliable design, low noise, smooth operation and long service life;
- With function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- With functions of anti-tail, anti-reverse pass and so on;
- Card can be set "with memory" or "without memory" functions;
- With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- With infrared anti-clip function (anti-clip when gate is open or running);
- Compatible with IC, ID card, scanning and face recognition, etc.
- Two modes of operation are available: open or closed.
- Various working modes are available, including two-way card reading and one-way card reading, etc.

Dimension

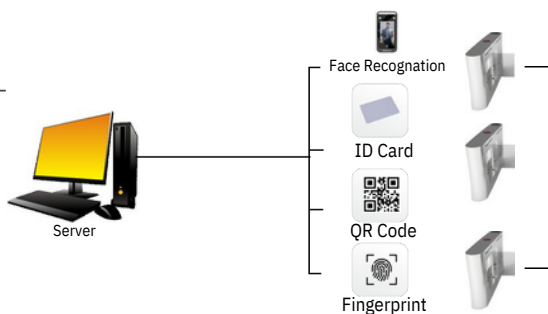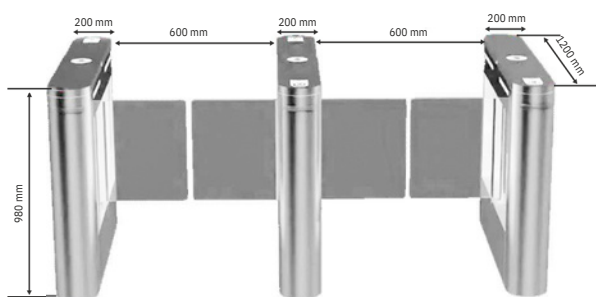

Specification

Material	: SUS304+ Acrylic / TemperedGlass
Size	: 1200x200x980mm
Sensor pairs	: 4
Pass rate	: 45p/m
Pass width	: 600mm (Customizable)
Input voltage	: 100V~240V
Motor type	: 24V DC brushless motor
Environment	: -20~+70°C
Motor power	: 40W
Input signal	: Dry contact/RS485
Life cycle	: 9 Million
IP Rating	: IP55
Rotating Speed	: 1800 RPM



ANTI - TAILGATING



BI-DIRECTIONAL



ACCESS CONTROL
SYSTEM



MANUAL
CONTROL